



Waterloo Deck-Mounted Faucet with Single Inlet and 12" Swing Spout

#750FD112

Item #: 750FD112 Qty: _____

Project: _____

Approval: _____ Date: _____



Features

- 12" swing spout with 2 GPM aerator
- Single base, 1/2" NPS inlets on 20" flexible water hoses
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridge with check valve

Certifications



CSA, US and Canada



Certified by NSF




1/2" Water Connection

Technical Data

Spout Length	12 Inches
Faucet Height	8 7/16 Inches
Cartridge Type	Ceramic
Faucet Centers	Single
Features	ASME A112.18.1 / CSA B125.1 NSF Certified NSF/ANSI 372 NSF/ANSI 61
Finish	Chrome
Flow Rate	2 GPM

Technical Data	
Handle Type	Lever
Material	Brass
Mounting Style	Deck Mounted
Mounting Type	Adjustable
Rough In	Single
Spout Clearance	6 1/8 Inches
Spout Connection Size	1"-20 UNEF
Spout Type	Swing
Sprayer	Without Sprayer
Temperature Rating	40 - 180 Degrees F
Thread Type	NPS
Type	Faucets
Water Inlet Size	1/2 Inches

Plan View

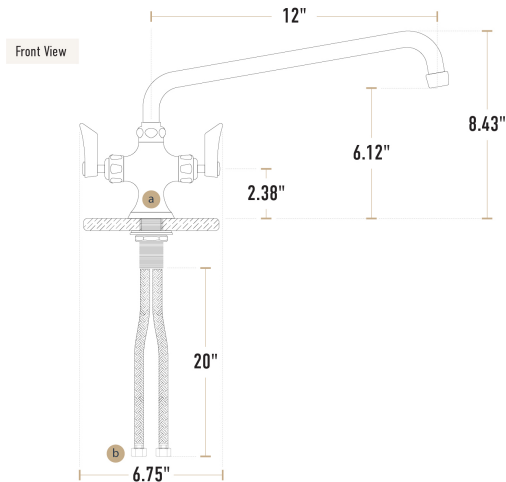

Connections

- a Single inlet base
- b (2) 3/8" NPT inlets on 20" flexible hoses

Notes & Details

This Waterloo deck-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a 12" long swing spout that moves easily around the sink bowl, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a single base, while the deck-mounted design is easy to install with a pair of 1/2" NPS inlets on 20" flexible water hoses.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

 **WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.