




Waterloo 0.65 GPM Low Profile Wall-Mounted Pre-Rinse Faucet with 8" Centers

#750PRWL8XLF

Item #: 750PRWL8XLF Qty: _____
 Project: _____
 Approval: _____ Date: _____



Features

- 23" hose with 0.65 GPM low flow spray valve
- Wall-mounted design with 8" adjustable centers and 1/2" NPT inlets
- Quarter-turn ceramic cartridges and check valves for high performance
- Heavy-duty faucet base and spray valve with chrome-plated brass construction
- Includes 10" riser and 6" wall bracket with low profile for height-restricted areas

Certifications

 CSA, US and Canada  Certified by NSF

 1/2" Water Connection

Technical Data


Hose Length	23 Inches
Faucet Height	20 1/2 Inches
Add-On Faucet	None
Cartridge Type	Ceramic
Faucet Centers	8 Inches
Finish	Chrome
Handle Type	Lever
Material	Brass
Mounting Style	Wall Mounted
Mounting Type	Adjustable

Technical Data

Features	ASME A112.18.1-2018 / CSA B125.1-18
	BPI Certified
	Kosher
	NSF Certified
	NSF/ANSI 372
Plug Type	NSF/ANSI 61
	NEMA L6-30P
Pre Rinse Unit Type	Mini Pre-Rinse Faucets
Spray Valve Flow Rate	0.65 GPM
Temperature Rating	180 Degrees F
Thread Type	NPT
Water Inlet Size	1/2 Inches

Plan View

750PRWL8X 750PRWL8XLF

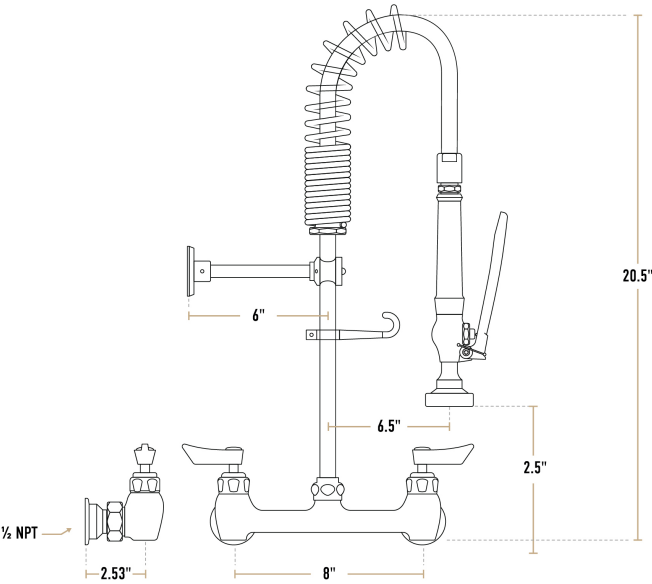

Notes & Details

Optimize your washing station with the Waterloo wall-mounted low profile pre-rinse faucet with 8" centers and low flow spray valve. This Waterloo wall-mounted pre-rinse faucet is perfect for rinsing excess food and sauces off of your dishes prior to running them through your commercial dish machine. A quality pre-rinse unit is vital to any dish room, removing the heaviest soil deposits so that dishes come out clean and ready to use. Waterloo products provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install Waterloo products with confidence.

This unit is intended for applications that provide water for warewashing and janitorial or utility use. Installed on 8" centers, this faucet also has a heavy-duty body that can withstand long-lasting use. This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed, removing the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. Great for height-restricted installations, this low-profile pre-rinse unit comes with a 10" riser and a 6" wall bracket to help secure the unit to the wall for added stability.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.